RS1 SX

With you on the front line

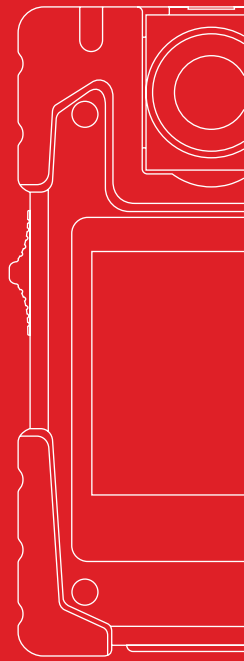

Quick Start and User Manual

V 1.0

REVEAL

WITH YOU ON THE FRONT LINE

REVEALMEDIA.COM

REVEAL

Introduction

Welcome to our most straightforward body camera. For your convenience, the camera is set up and ready to go in three easy steps.

1 Charge

Charge the camera for three hours or until the blue light turns off.

2 Mount

Choose how to mount your camera; you can use either the Klickfast attachment, clips or a lanyard.

3 Record

Slide the red switch down to start recording. To stop recording, slide the red switch up.

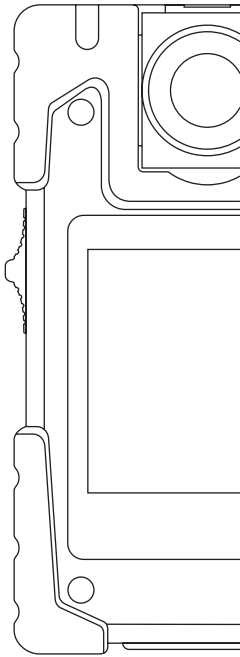

1 Charge

Open the cover on the bottom of the camera.

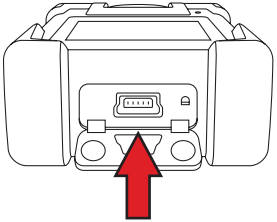

Insert the mini USB into the port and connect to a computer or plug in to charge.

NOTE: This is the same cable that will upload video to a computer.

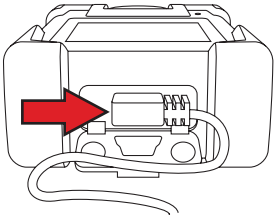

2 Mount

Choose your mount:

- Klickfast stud
- Shirt clip (adjustable for male and female shirts)
- Pocket clip (for use with lanyard)

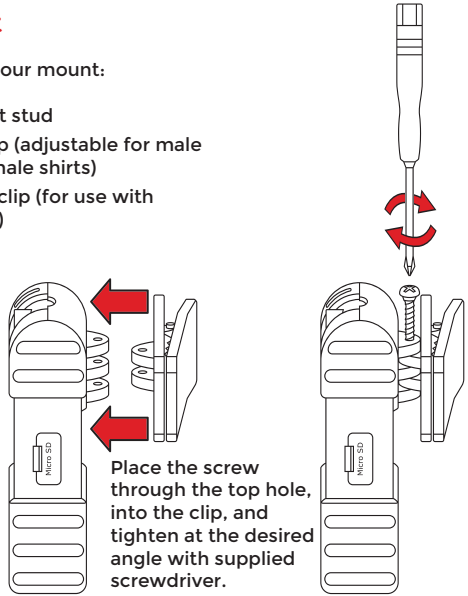

Slot clip into place, ensuring the 2 plates on the clip are between the 3 plates on the back of the camera, and align the holes.

Place the screw through the top hole, into the clip, and tighten at the desired angle with supplied screwdriver.

Quick start

3 Record

Pull down the red switch to record.

As confirmation:

- The camera will beep three times.
- The LED and the recording icon on the screen will flash red.

Pull the switch back up to stop recording.

As confirmation:

- The camera will beep twice.
- The lights will stop flashing and the camera will turn off.

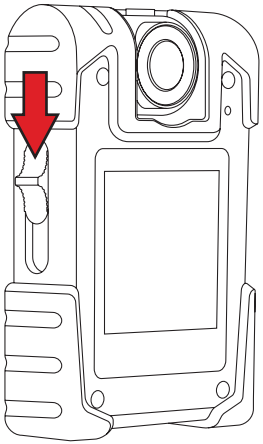

Operation

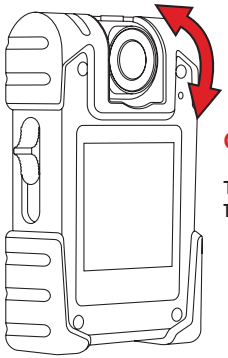

Camera articulation

The camera head rotates 110° vertically.

Camera rotation

To set the RS1-SX to sit correctly against the body, fasten to the desired angle by tightening the screw at the top of the camera.

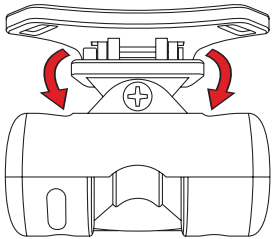

Operation

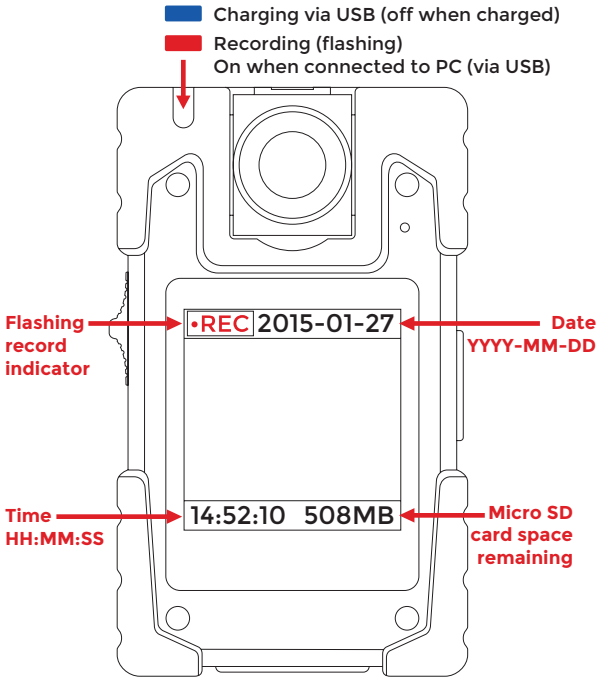

Operation

NOTE: Recordings will stop automatically when the card is full.

Editing settings options

1. Connect RS1 - SX to your computer's USB port and turn on the camera.

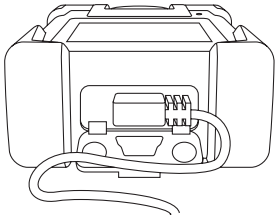

2. Navigate to the RS1-SX removable disk drive on your computer.



3. Double click on the drive and you will see the following RS1 utility icon. Double click on this to start the setup procedure.

Editing settings options

4. This will launch the first of two screens. Follow the instructions on these screens.

   1. Select the RS1 - SX camera you want to change settings on.
   2. While still connected to the PC, turn off RS1 - SX then turn it on again.


RS1 Utility
RS1 Setup
Once you have clicked the button below you will need to turn off your RS1 then turn it on again
Select RS1
RS1B1234
Click to edit RS1 settings
reveal



Editing settings options

Once you have rebooted the RS1 - SX, you will see the following setup utility. Please enter the default password. The default password is “admin”.

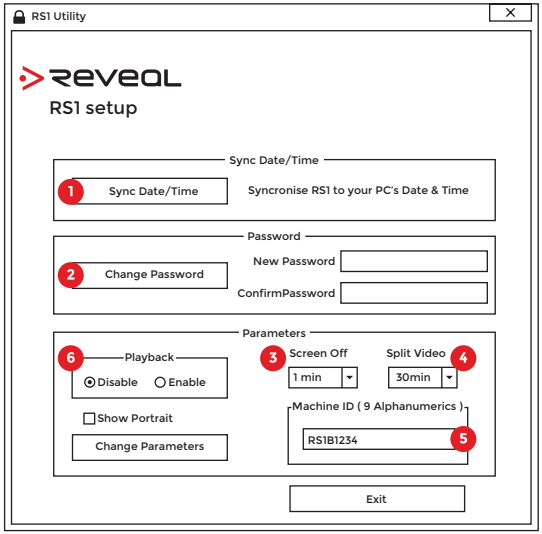

Editing settings options

The following settings can be changed by running the RS1 - SX setup utility:

1. Date and time: this takes the time from your PC (ensure your PC’s clock is accurate).
2. Utility password: the default password is “admin”.
3. LCD screen off time: to conserve battery power, the screen can be set to automatically switch off after the time set in this option.
4. Split video: this setting will ensure that long recordings are split into sections according to the length specified.
5. Machine ID: the unit has been assigned a unique number during production that you may wish to change. This sets the unit ID for the camera. The machine ID must start with RS1B.
6. Enable/disable playback.

NOTE: You must click “Change Parameters” before exiting.

Mounting and usage options



Klickfast

Attach the Klickfast to use with a Klickfast dock.



Shirt clip

For use on a shirt (ajustable for male and female shirts).



Pocket clip

For use with a lanyard around the neck or attached to a pocket.

Mounting and usage options

Harness

For use with loose fitting clothes or uniforms. (optional extra)



Table top

For use in interviews and other static situations.